



Series 6000 Long Body Compression Fittings

Features of the Series 6000 Compression Coupling

- 1/2" Through 2" Diameter
- Fits Steel Tubing and PVC Pipe (IPS Sizes)
- Bright Electro Galvanic Coating
- 100% Air and Conductivity Tested
- 150 PSI Working Pressure
- EZ-Wrench Grip on Body



- NBR Gasket Material compounded to resist various line contents (not recommended for use on Natural Gas)
- Gasket toe includes a helically molded brass armoring for extra protection against line content and cold flow
- Full Gasket Retainer Cup provided between the gasket and the compression nut to prevent cold flow of gasket from behind the compression nut
- Temperature Range: -40 to +212°F
- Ductile Iron Material of Construction - Nut and Body

TPS

Total Piping Solutions, Inc.
1760 Haskell Road
P.O. Box 525
Olean, NY 14760
716-372-0160
Fax: 716-372-1767
email: sales@tps.us
Visit Our Website: <http://tps.us>

FORM #: 6000-03-07

Series 6000 Long Body Compression Fittings



Installs on plain-end pipe or tubing

Easy to Use - installs in seconds


Flexibility - each and every joint is a flexible union which can be disassembled for maintainability

Adapter Gasket Sleeves Available for conversion to Copper



Total Piping Solutions, Inc.
1760 Haskell Road
P.O. Box 525
Olean, NY 14760
716-372-0160
Fax: 716-372-1767
email: sales@tps.us
Visit Our Website: <http://tps.us>

Quality Products and Services
Competitive Pricing
Availability
Proven Time Savings
Superior Response

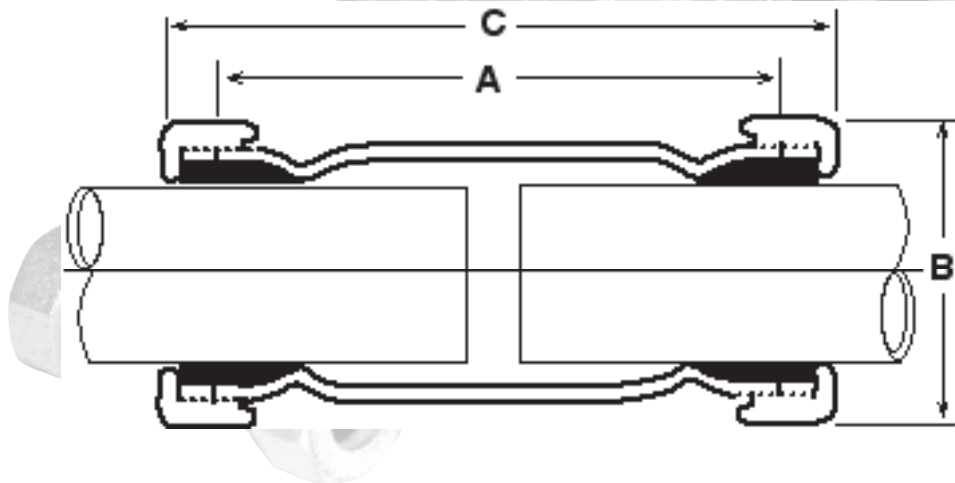

Nominal Pipe Size (Inches)	Pipe O.D.	Wt. Ea. Lbs.	Carton Qty.	Carton Wt. Lbs	Part Number
1/2	.840	24	24	6000-0840-150	
3/4	1.050	24	32	6000-1050-150	
1	1.315	1.5	16	246000-1315-150	
1-1/4	1.660	1.80	12	22	6000-1660-150
1-1/2	1.900	2.70	12	33	6000-1900-150
2	2.375	3.50	12	42	6000-2375-150

Nominal Pipe Size	Dimensions in Inches			
	Pipe O.D.	A	B	C
1/2	.840	3.35	1.68	4.13
3/4	1.050	3.62	1.94	4.33
1	1.315	4.00	2.21	4.53
1-1/4	1.660	4.00	2.61	4.72
1-1/2	1.900	4.00	2.94	4.92
2	2.375	4.44	3.56	5.31

