



# *Series 2600 Dismantling HYJOINT<sup>®</sup>*



*Quick Connections of  
Valves  
Pumps  
Meters  
Piping Assemblies*

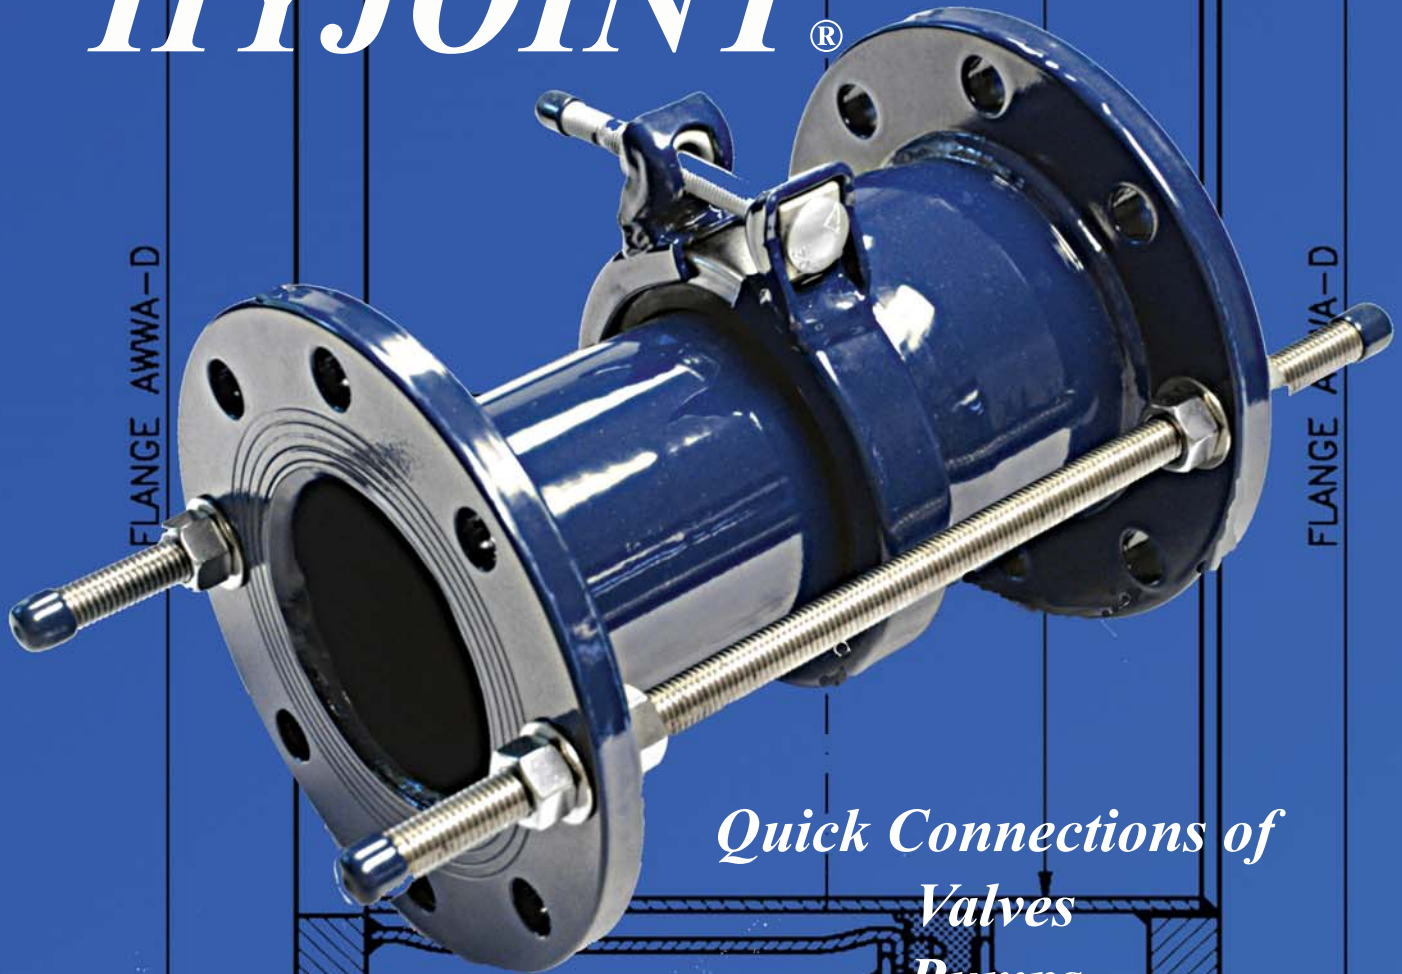

*Total Piping Solutions, Inc.*

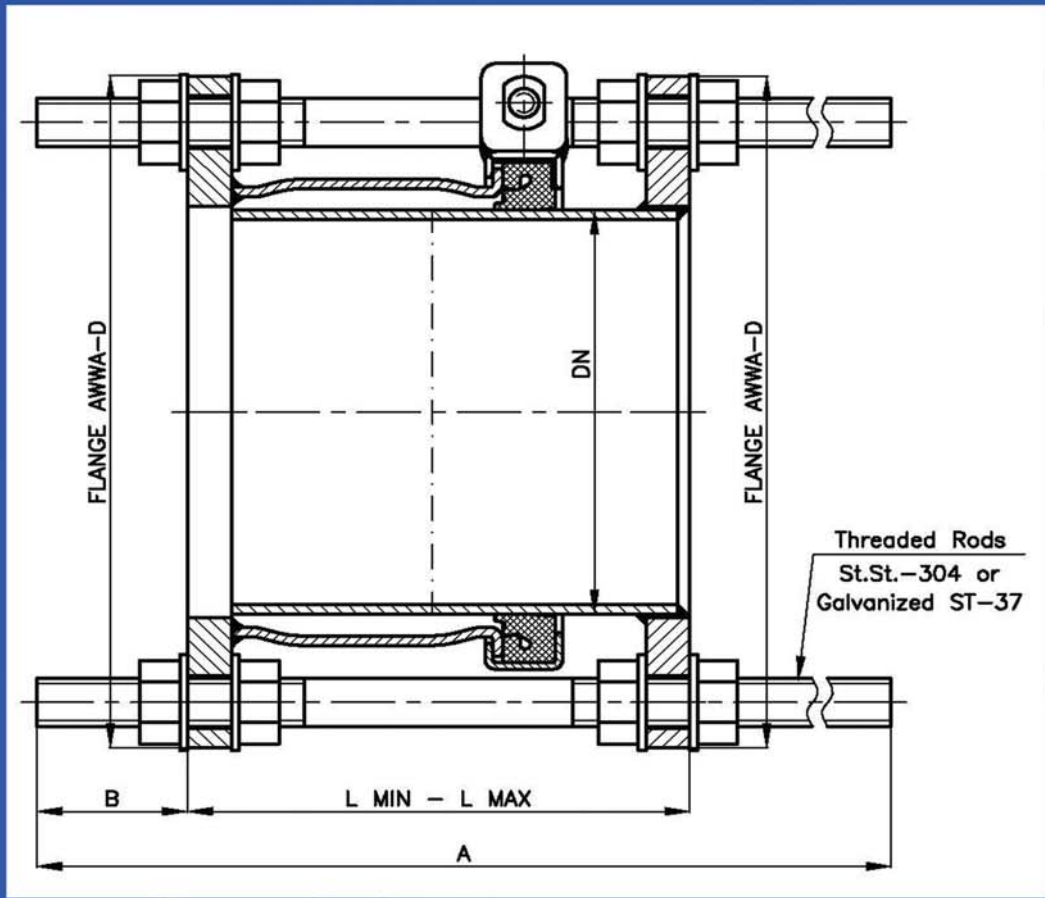

# Series 2600 Dismantling HYJOINT 3 to 10 Inch

*HyHYJOINT is a registered trademark of Krausz Industries, Ltd.*


DN (mm/inch)	L MIN (inch)	L MAX (inch)	Threaded Rods (inch)	No. Rods (pcs)	A (inch)	B (inch)
80/3"	8.27	11.42	5/8	2	16.93	2.76
100/4"	8.27	11.42	5/8	2	16.93	2.76
125/5"	8.27	11.42	3/4	4	16.93	2.76
150/6"	8.27	11.42	3/4	4	16.93	2.76
200/8"	11.02	16.14	3/4	4	22.44	3.15
250/10"	11.02	16.14	7/8	4	22.44	3.15

*For Inquiries Call, Fax or E-mail  
Total Piping Solutions, Inc.  
Phone: 716-372-0160  
Fax: 716-372-1767  
E-mail: sales@tps.us  
Web Site: www.tps.us*

*Note: For specific information, dimensions, or special applications on the 2600 Dismantling Joint, consult Total Piping Solutions, Inc.*

L MIN - L MAX

# Series 2600 Dismantling HYJOINT 12-24 Inch

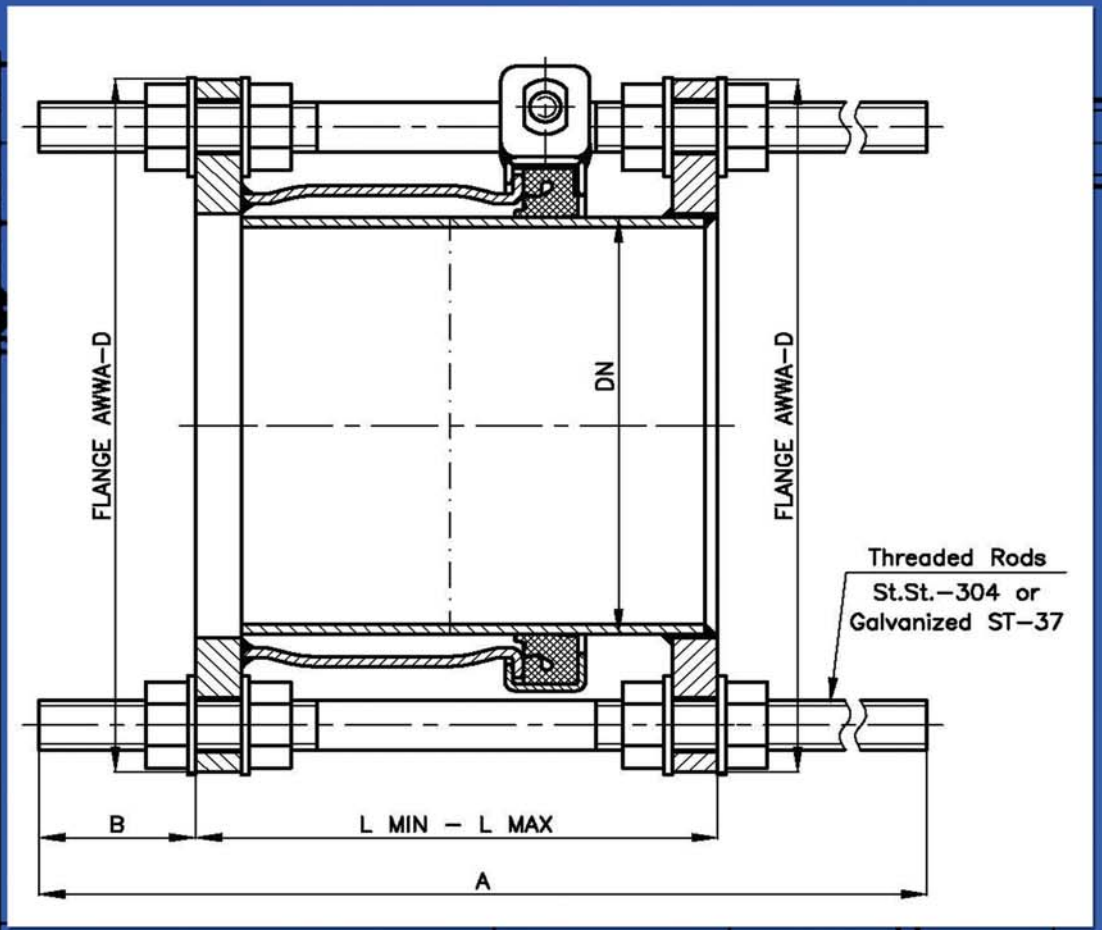

DN (mm/inch)	L MIN (inch)	L MAX (inch)	Threaded Rods (inch)	No. Rods (pcs)	A (inch)	B (inch)
300/12"	11.02	16.14	7/8	4	22.44	3.15
350/14"	11.02	16.14	1	4	22.44	3.15
400/16"	11.02	16.14	1	4	22.44	3.15
450/18"	13.78	18.90	1 1/8	4	26.77	3.94
500/20"	13.78	18.90	1 1/8	4	26.77	3.94
600/24"	13.78	18.90	1 1/4	4	26.77	3.94

The Series 2600 Dismantling Joint is suited to a wide range of pipe joining applications that will allow the user to quickly make equipment disconnects and change-outs. Utilizing the latest in sealing technologies, NSF 61 Coatings and Gasket Compounds, AWWA Class "D" flanges, along with a superior Fusion Bonded Epoxy Coating, the 2600 Dismantling Joint is the right product for each and every job.



Series 2600

# Dismantling HYJOINT

HYJOINT is a Registered Trademark of Krausz Industries, Ltd.



## Dismantling Joint Specifications

*AWWA Class "D" Spool Piece and Flange with ANSI 125/150 Drilling 3" through 24" Diameters*

*Gaskets are Pressure Assisted Type Compounded for Water and Sewer Service of NSF 61 Grade EPDM (NBR also available)*

*Nuts and Bolts - 304 Stainless Steel per ANSI 304/303 with No-Gall Zinc Cobalt Coating*

*Restraining Tie-Rods - ASTM A 193 B7 High Strength Steel or optional ANSI 304-303 Grade Stainless Steel*

*Body Material - High Strength Mild Grade Carbon Steel with NSF-61 Registered Fusion Bonded Epoxy Coating Approximately 14 mils*

*Pressure Rated up to 175 PSI Working Pressure with 1.5x Test Pressure*

*Easy Fit with One Center Compression Bolt to Tighten*

*Fully Adjustable Lay Length*

*For Inquiries Call, Fax or E-mail  
Total Piping Solutions, Inc.*

*Phone: 716-372-0160*

*Fax: 716-372-1767*

*E-mail: [sales@tps.us](mailto:sales@tps.us)*

*Web Site: [www.tps.us](http://www.tps.us)*



This Product is not intended for use on natural gas piping or any other type of gas piping. To do so could result in escaping gas that could ignite and cause property damage, serious injury or death.

L MIN - L MAX

Form #: 2600-08/07