


A
1:1

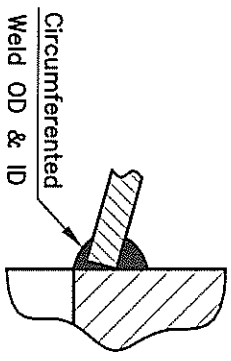

- 1) Hymax 2000 meets or exceeds all specifications of AWWA Standard C219.
- 2) Center Ring – ASTM A 53 Grade A steel.
- 3) End Rings – ASTM A 795 steel.
- 4) Gaskets – EPDM compounded for water and sewerage, meets NSF 61 requirements.
- 5) Bolts & Nuts – Type 304 stainless steel. Rolled thread and anti galling coating.
- 6) Bridge – Type 304 stainless steel.
- 7) Coating – 100% Fusion bonded epoxy for enhanced corrosion protection.
Average thickness 14 Mil.
- 8) G = Min. Pipe Insertion of 2.25 inch
- 9) Flange – meets AWWA class D.

Material	Weight	Note	Part Name:	Scale
			HYMAX F 2000	
A		Day Name	Catalog No.	Project:
		Drawn 01.03.11 S.LORA		Sheet
		Check	Drawing No.	1 of 2
		Appr		
Confidential Information. All rights reserved to Krausz Industries Ltd. This document may not be copied, reproduced, displayed, modified or used in any way, whether in whole or in part, without the express prior written consent of Krausz Industries Ltd.				
				KRAUSZ

DN (inch)	Flange (inch)	Overall Range (inch)	Before removal the inner layer (inch)	After removal the inner layer (inch)	D1 (inch)	H (inch)	i (inch)	L (inch)	D2 (inch)	B (inch)	No.-d (mm)	Torque (Ft-Lbs)	Working Pressure (PSI)	Approx. Weight (Lbs)
14"	14"	15.00-17.10	15.00-16.10	16.02-17.10	Ø21.0	23.2	8.0	10.8	Ø21.0	Ø15.43	2 -M16	150	175	
16"	16"	17.10-19.20	17.10-18.19	18.11-19.20	Ø23.2	25.6	8.0	10.8	Ø23.5	Ø17.91	2 -M16	150	175	
18"	18"	19.20-21.30	19.20-20.29	20.21-21.30	Ø25.3	27.8	8.0	10.8	Ø25.0	Ø19.09	2 -M16	150	175	
20"	20"	21.25-23.35	21.25-22.35	22.27-23.35	Ø27.3	29.8	8.0	10.9	Ø27.5	Ø21.34	2 -M16	150	175	
24"	24"	23.85-25.95	23.85-24.96	24.88-25.95	Ø29.1	31.7	8.0	11.0	Ø32.0	Ø25.91	2 -M16	150	175	
24"o.s.	24"	24.60-26.70	24.60-25.67	25.59-26.70	Ø30.6	33.2	8.0	11.0	Ø32.0	Ø25.91	2 -M16	150	175	

Material		Weight		Note		Part Name: HYMAX F 2000		Scale	
G				Drawn	01.03.11	S.LORA	Catalog No.	Project	
Change	Day	Name	Appr	Check			Drawing No.	Sheet	
								2 of 2	

Confidential Information. All rights reserved to Krausz Industries Ltd.
This document may not be copied, reproduced, displayed, modified or used
in any way, whether in whole or in part, without the express prior written
consent of Krausz Industries Ltd.



KRAUSZ