

*Series 2600 Dismantling*

# Hyjoint<sup>®</sup>



**For Quick Connections of Valves, Pumps, Meters and  
other Piping Assemblies**



**Total Piping Solutions, Inc.**

# Series 2600 Dismantling **HYJOINT**<sup>®</sup>

## **Saves Time, Saves Money . . .**

The Series 2600 Dismantling HYJOINT<sup>®</sup> is a flanged fitting designed to provide longitudinal adjustment in flanged piping systems. The HYJOINT is a quick-connect product requiring no disassembly prior to installation. Installer simply connects the flange bolts, tightens the center compression bolt to the required torque, and tightens the restraining rods at the end. Available in 3" through 24" diameters, the HYJOINT will allow the user to quickly make equipment disconnects and change-outs of valves, pumps, meters and other piping assemblies. The HYJOINT comes standard with AWWA Class "D" Flanges, fusion-bonded epoxy coated steel body, 304 stainless steel hardware, and is fully restrained across the joint. The HYJOINT has a test-confirmed 175 psig working pressure.




Note: For specific information, dimensions or special applications for the Series 2600 Dismantling HYJOINT, consult Total Piping Solutions, Inc.

### **Series 2600 Dismantling HYJOINT Specifications**


- AWWA Class "D" Spool Piece and Flange with ANSI 125/150 Drilling 3" through 24" Diameters
- Gasket: Pressure-Assisted, EPDM Compounded for Water and Sewer Service
- Nuts and Bolts: 304 Stainless Steel per ASTM A193-B8 Type 304/303 with No-Gall Zinc Cobalt Coating
- Restraining Tie Rods: ASTM A 193-B7 High Strength Steel or ASTM A193-B8 Type 304/303 Grade Stainless Steel
- Body Material: High Strength Mild Grade Carbon Steel with NSF-61 Registered Fusion Bonded Epoxy Coating, 14 Mils Average Thickness
- Pressure Rating: Rated to 175 PSI per AWWA C219
- Easy Fit with One 304 Stainless Steel Center Compression Bolt to Tighten.
- Fully Adjustable Lay Length
- Product: Complies with NSF 61

# Series 2600 Dismantling HYJOINT<sup>®</sup>

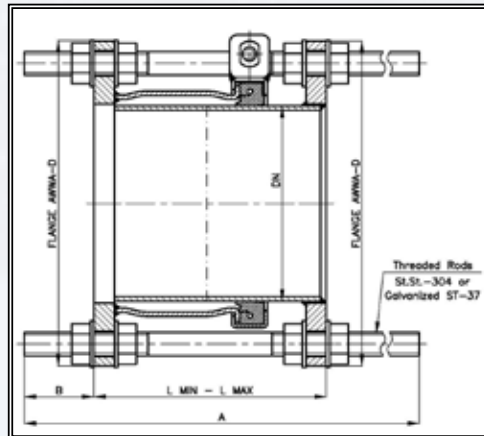

Series 2600 Dismantling HYJOINT, 3" – 10"

DN (mm/inch)	L MIN	L MAX	Threaded Rods (inch)	No. Rods (pcs)	A (inch)	B (inch)
80/3"	8.27	11.42	5/8	2	16.93	2.76
100/4"	8.27	11.42	5/8	2	16.93	2.76
125/5"	8.27	11.42	3/4	4	16.93	2.76
150/6"	8.27	11.42	3/4	4	16.93	2.76
200/8"	11.02	16.14	3/4	4	22.44	3.15
250/10"	11.02	16.14	7/8	4	22.44	3.15

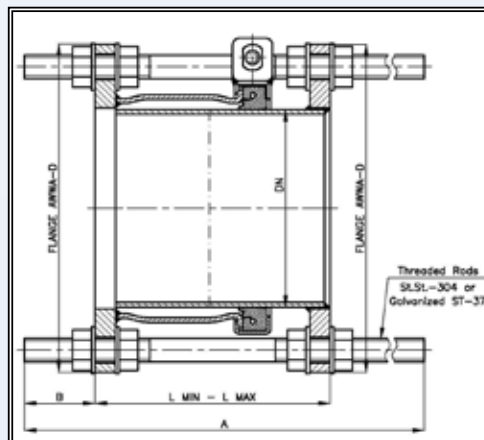

Series 2600 Dismantling HYJOINT, 12" – 24"

DN (mm/inch)	L MIN	L MAX	Threaded Rods (inch)	No. Rods (pcs)	A (inch)	B (inch)
300/12"	11.02	16.14	7/8	4	22.44	3.15
350/14"	11.02	16.14	1	4	22.44	3.15
400/16"	11.02	16.14	1	4	22.44	3.15
450/18"	13.78	18.90	1-1/8	4	26.77	3.94
500/20"	13.78	18.90	1-1/8	4	26.77	3.94
600/24"	13.78	18.90	1-1/4	4	26.77	3.94



*Total Piping Solutions, Inc.*  
1760 Haskell Road, Olean, New York 14760  
TEL: 716-372-0160, FAX: 716-372-1767  
E-Mail: sales@tps.us  
VISIT OUR WEBSITE: <http://tps.us>



Patented and Trademarked by *Krausz Industries, Ltd.*

